

PROFESSIONAL

DRIVEVISIONGS



Target group

Progressive lens for day and night driving. Presbyopes who want more comfort while driving. Age 45+

Technology

IOT Endless Drive Progressive
PureGlide – antireflex coating

Method of production

The internal construction of a progressive surface.

Diopters ordering

1/4, 1/8, 1/100

Individual parameters

IPD, PL, Vertex, Panto, Ztilt, NVD

Inset

If necessary, from 0 to 4 or automatic calculation of Inset.

Progressive length

16 mm, 18 mm

Minimum fitting height

18 mm, 20 mm

Optimization

Special thinning for the lens in the plus range based on the shape of the frame and the parameter for fitting the lens to the frame. If the lens is ordered without the Optimization option, the topography of the lens will be decentered nasally in relation to the geometric center by 2.5 mm.

User ratings

Vision – distance



Vision – near vision field



Spontaneous adaptation



Vision – medium distance



Comfort




Use of digital devices



Markings on the lenses

■ engravings
■ markers

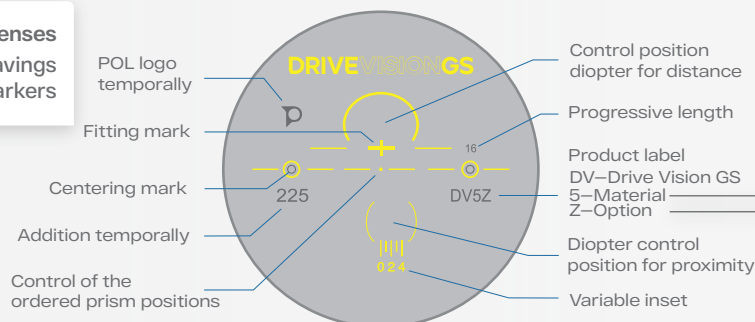

MATERIALS

1.50 CR-39	1
1.53 Trivex	2
1.59 Poly	4
1.60 High Index	5
1.60 Tribrid	6
1.67 High Index	7
1.74 High Index	8

OPTIONS

None	W	Transitions GEN 8 Sapphire	F	Nupolar Gray	S
Remove 400	H	Transitions GEN 8 Amethyst	M	Nupolar Gray Light	L
Remove 420	R	Transitions GEN 8 Amber	A	Nupolar Green	E
Remove 420 Photomatic Brown	O	Transitions GEN 8 Emerald	E	Transitions XTRActive Polarised Gray	X
Remove 420 Photomatic Gray	U	Transitions XTRActive Brown	C	DriveWear	D
Transitions GEN 8 Brown	Z	Transitions XTRActive Gray	L		
Transitions GEN 8 Gray	N	Transitions XTRActive Green	K		
Transitions GEN 8 Green	V	Nupolar Brown	B		