

BIFOKAL

INVISIO



Target group

Users who already use a traditional bifocal lens, as well as users who for certain reasons cannot use a progressive lens.

Technology

IOT Digital Free Form Round Bifo 28
IOT Digital Free Form Ultex Bifo 40

Method of production

Internal manufacturing of bifocal surface.

Diopters ordering

1/4



Minimum fitting height


17 mm

Optimization

Special thinning for the lens in the plus range based on the shape of the frame and the parameter for fitting the lens to the frame. If the lens is ordered without the Optimization option, the topography of the lens will be decentered nasally in relation to the geometric center by 2.5 mm.

Markings on the lenses

 engravings
 markers

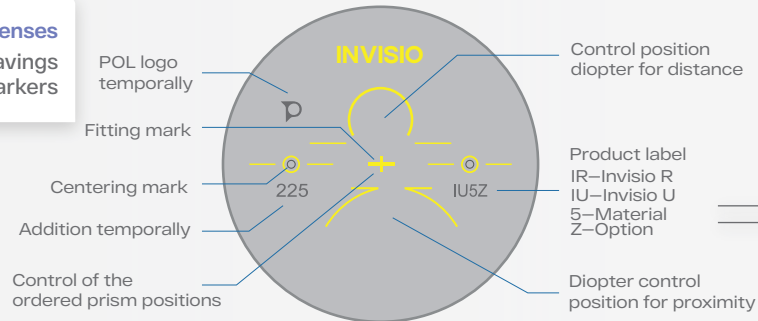

MATERIALS

1.50 CR-39	1
1.53 Trivex	2
1.56 Mid. index	3
1.59 Poly	4
1.60 High Index	5
1.60 Tribrid	6
1.67 High Index	7
1.74 High Index	8

OPTIONS

None	W	Transitions GEN 8 Sapphire	F	Nupolar Gray	S
Remove 400	H	Transitions GEN 8 Amethyst	M	Nupolar Gray Light	L
Remove 420	R	Transitions GEN 8 Amber	A	Nupolar Green	E
Remove 420 Photomatic Brown	O	Transitions GEN 8 Emerald	E	Transitions XTRActive Polarised Gray	X
Remove 420 Photomatic Gray	U	Transitions XTRActive Brown	C	Photomatic Brown	B
Transitions GEN 8 Brown	Z	Transitions XTRActive Gray	L	Photomatic Gray	I
Transitions GEN 8 Gray	N	Transitions XTRActive Green	K	DriveWear	D
Transitions GEN 8 Green	V	Nupolar Brown	B		