

PROGRESSIVE
VARIA 4K



Target group

Experienced users of progressive lenses. Age 45+.

Technology

IOT Camber Steady
Plus Progressive

Method of production

Bilateral progressive geometry.

Diopter ordering

1/4, 1/8, 1/100

Individual parameters

IPD, PL, Vertex, Panto, Ztilt, NVD

Inset

If necessary, from 0 to 4 or automatic calculation of Inset.

Progressive length

14 mm, 15 mm, 16 mm, 17 mm, 18 mm,
or variable in relation to the height
of the fitting.

Minimum fitting height

16 mm, 17 mm, 18 mm, 19 mm, 20 mm

Optimization

Special thinning for the lens in the plus range based on the shape of the frame and the parameter for fitting the lens to the frame. If the lens is ordered without the Optimization option, the topography of the lens will be decentered nasally in relation to the geometric center by 2.5 mm.

User ratings

Vision – distance



Vision – near vision field



Spontaneous adaptation



Vision – medium distance



Comfort




Use of digital devices



Markings on the lenses

■ engravings
■ markers

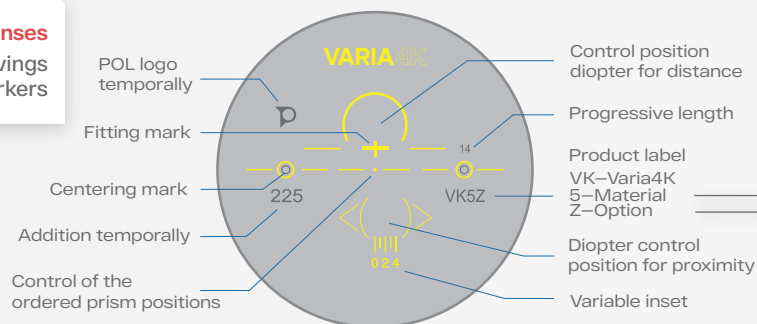

MATERIALS

1.50 CR-39	1
1.53 Trivex	2
1.59 Poly	4
1.60 High Index	5
1.67 High Index	7
1.74 High Index	8

OPTIONS

None	W	Transitions XTRActive Brown	C
Remove 420	R	Transitions XTRActive Gray	L
Transitions GEN 8 Brown	Z	Nupolar Brown	B
Transitions GEN 8 Gray	N	Nupolar Gray	S