



Zielgruppe

Kunden, die äußerst klares und präzises Sehen beim Fahren nachts wünschen.

Technologie

IOT Endless Drive SV

Herstellungsverfahren

Rückseitiger Aufbau des Einstärkenglases.

Abstufungen der Dioptrien

1/4, 1/8, 1/100

Individuelle Parameter

PD, HSA, VN, FSW

Optimierung MDR


Mittendickenreduktion bei Plusgläsern:
Optimale Glasdicke durch Übermittlung der Glasform, der Fassungsgröße und der Zentrierdaten.
Ohne Optimierung ist das Glas um 2.5mm vordezentriert.

Markierungen auf den Gläsern

■ Gravuren
■ Stempel

MATERIALIEN

1.50 CR-39	1
1.53 Trivex	2
1.59 Poly	4
1.60 High Index	5
1.60 Tribrid	6
1.67 High Index	7
1.74 High Index	8

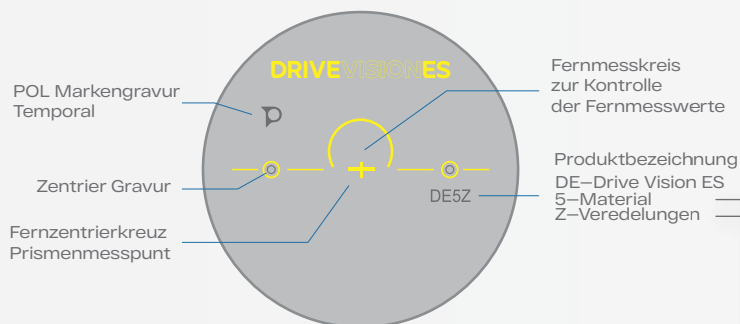

VEREDELUNGEN

Farblos	W	Transitions GEN 8 Saphir	F	Nupolar Grau	S
Remove 400	H	Transitions GEN 8 Amethyst	M	Nupolar Grau Light	L
Remove 420	R	Transitions GEN 8 Bernstein	A	Nupolar Grün	E
Remove 420 Photomatic Braun	O	Transitions GEN 8 Smaragdgrün	E	Transitions XTRActive Polarisierend Grau	X
Remove 420 Photomatic Grau	U	Transitions XTRActive Braun	C	DriveWear	D
Transitions GEN 8 Braun	Z	Transitions XTRActive Grau	L		
Transitions GEN 8 Grau	N	Transitions XTRActive Grün	K		
Transitions GEN 8 Grün	V	Nupolar Braun	B		