



Target group

Experienced users of progressive lenses. Age 45+.

Technology

Horizon Optical Maximo

Method of production

The internal manufacturing of a progressive surface, including Free View technology.

Diopter ordering

1/4, 1/8, 1/100

Individual parameters

IPD, PL, Vertex, Panto, Ztilt, NVD, Inset

Inset

If necessary, from 0 to 4 or automatic calculation of Inset.

Progressive length

14 mm, 15 mm, 16 mm, 17 mm, 18 mm, or variable in relation to the height of the fitting.

Minimum fitting height

16 mm, 17 mm, 18 mm, 19 mm, 20 mm

Optimization

Special thinning for the lens in the plus range based on the shape of the frame and the parameter for fitting the lens to the frame. If the lens is ordered without the Optimization option, the topography of the lens will be decentered nasally in relation to the geometric center by 2.5 mm.

User ratings

Vision – distance


Vision – near vision field

Spontaneous adaptation

Vision – medium distance

Comfort

Use of digital devices

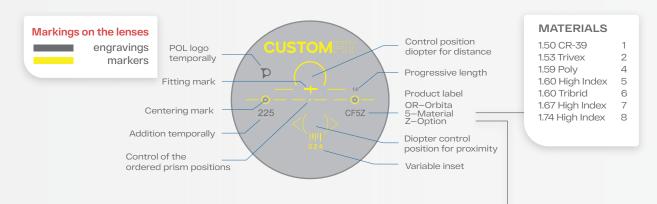

OPTIONS					
None	VV	Transitions GEN 8 Sapphire	F	Nupolar Gray	S
Remuve 400	Н	Transitions GEN 8 Amethyst	M	Nupolar Gray Light	L
Remuve 420	R	Transitions GEN 8 Amber	Α	Nupolar Green	E
Remuve 420 Photomatic Brown	0	Transitions GEN 8 Emerald	E	Transitions XTRActive Polarised Gray	X
Remuve 420 Photomatic Gray	U	Transitions XTRActive Brown	С	DriveWear	D
Transitions GEN 8 Brown	Z	Transitions XTRActive Gray	L		
Transitions GEN 8 Gray	Ν	Transitions XTRActive Green	К		
Transitions GEN 8 Green	V	Nupolar Brown	В		