



Target group

Presbyopes who spend most of the day indoors, working on a laptop, reading various documents, or talking to clients. Age 45+.

Note: The use of this type of lens in traffic is strictly prohibited.

Technology

IOT Endless Office Occupational

Method of production

The internal manufacturing of the digressive surface.

Diopters ordering

Method of ordering

Diopter distance/proximity Addition from 1.00 to 3.50

Use pupillary distance for distance, preferably for each eye individually (IPD)

Selection of working distance:

- from 0,4 m to 1,3 m design 1,3
- from 0,4 m to 2,0 m design 2,0
- from 0,4 m to 4,0 m design 4,0

Progressive length 14 mm, 18 mm

Minimum fitting height


16 mm. 20 mm

Optimization

Special thinning for the lens in the plus range based on the shape of the frame and the parameter for fitting the lens to the frame. If the lens is ordered without the Optimization option, the topography of the lens will be decentered nasally in relation to the geometric center by 2.5 mm.

User ratings



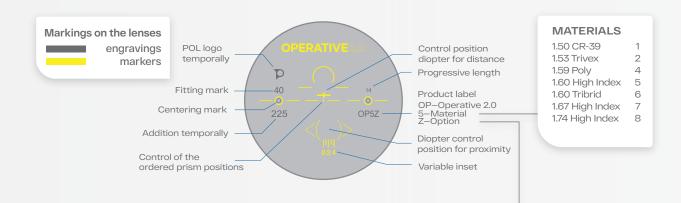

OPTIONS

Transitions GEN 8 Green

None	W	Transitions GEN 8 Sapphire	F	Nupolar Gray	S
Remuve 400	Н	Transitions GEN 8 Amethyst	M	Nupolar Gray Light	L
Remuve 420	R	Transitions GEN 8 Amber	Α	Nupolar Green	Ε
Remuve 420 Photomatic Brown	0	Transitions GEN 8 Emerald	E	Transitions XTRActive Polarised Gray	X
Remuve 420 Photomatic Gray	U	Transitions XTRActive Brown	С	DriveWear	D
Transitions GEN 8 Brown	Z	Transitions XTRActive Gray	L		
Transitions GEN 8 Gray	Ν	Transitions XTRActive Green	К		

Nupolar Brown